




Samsung Galaxy Tab 3 10.1 Charging Port & Microphone Replacement

How to replace the charging port and microphone of the Samsung Galaxy Tab 3 10.1

Written By: Corey Brown

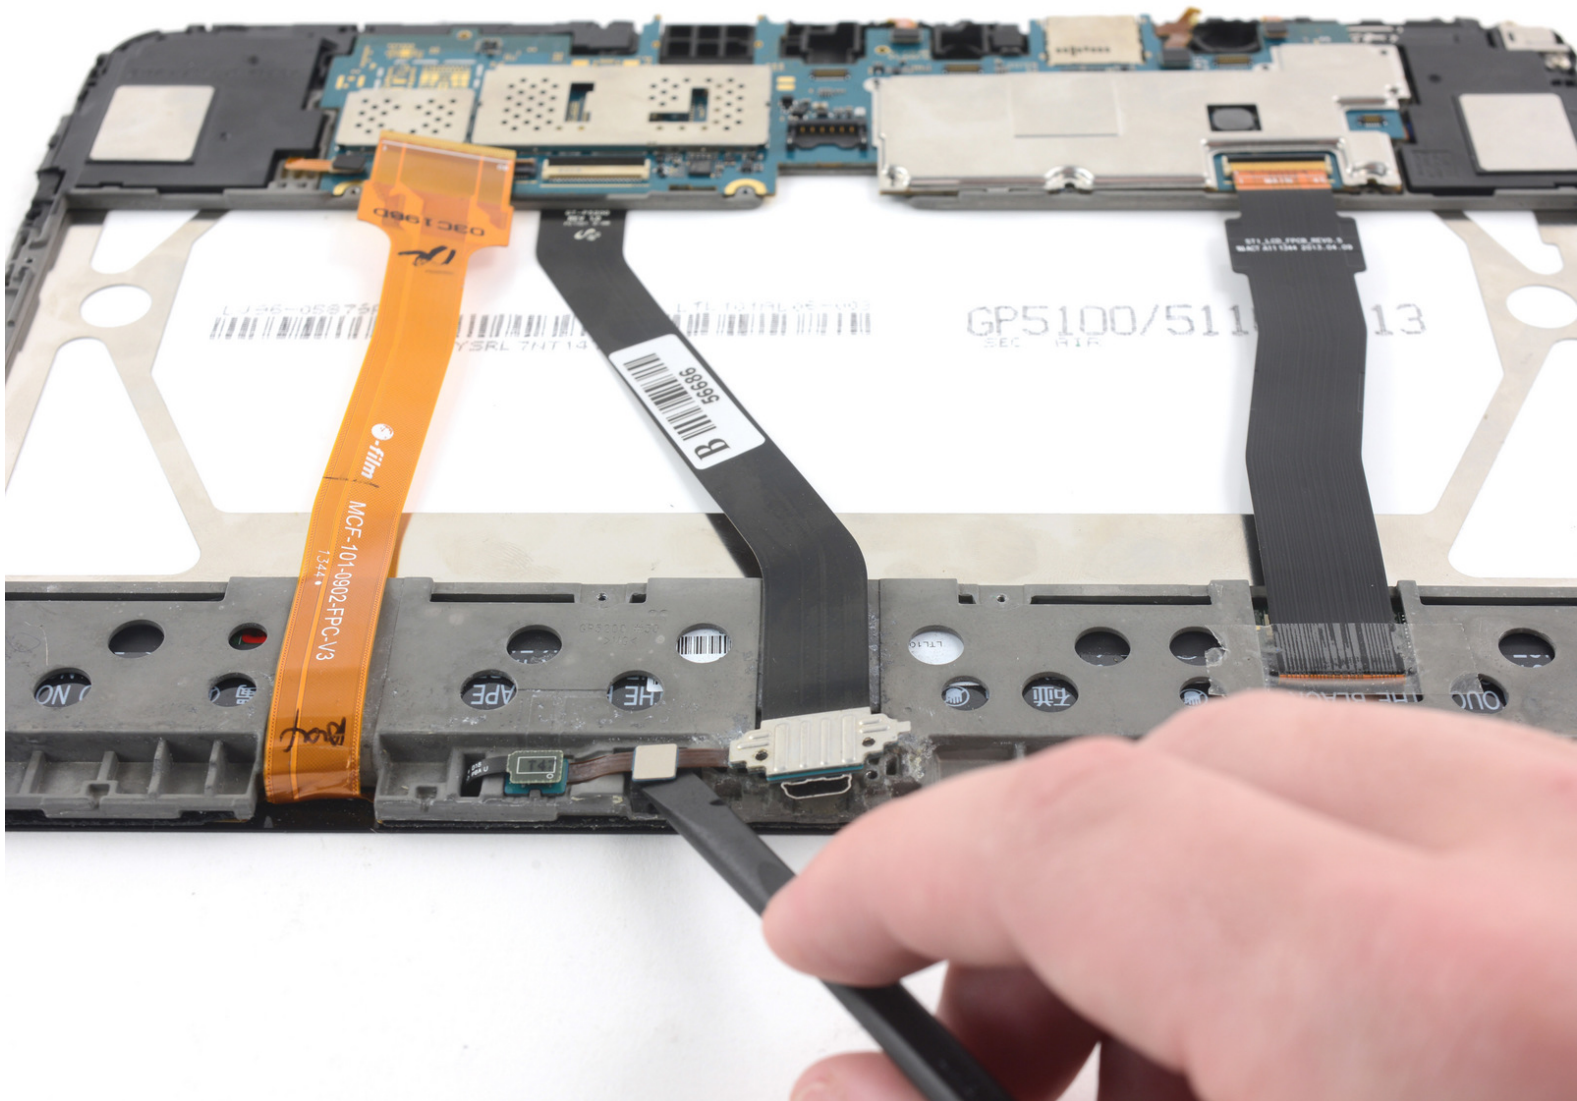

INTRODUCTION

If you have a defective charging port or microphone, us this guide to remove the component and replace it. The charging port is connected to a ribbon cable that is also connected to the microphone. You'll need to replace the whole assembly if either component is damage individually.



TOOLS:

- [iFixit Opening Picks set of 6](#) (1)
 - [Spudger](#) (1)
 - [Phillips #000 Screwdriver](#) (1)
-

Step 1 — Rear Case



- Insert an opening pick between the rear case and the plastic rim.

i You may need to add multiple picks to detach the clips.




- Slide the pick along the edge of the rear case until you release the plastic clips attaching the rear case to the display.
- Continue to slide the pick around the edge of the rear case until all clips are released.

Step 2




- Lift the case up to remove it.

Step 3 — Charging Port & Microphone

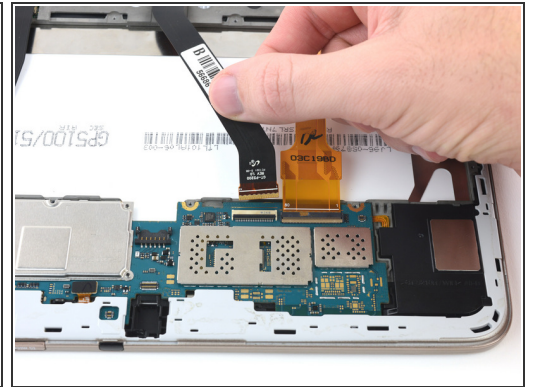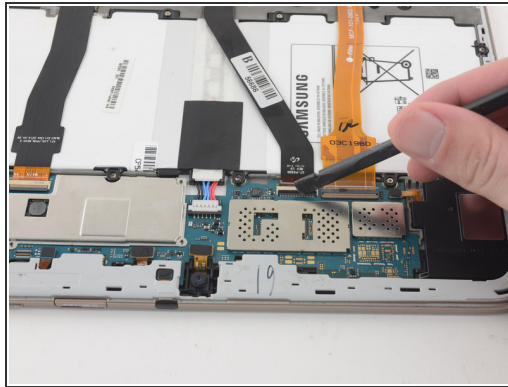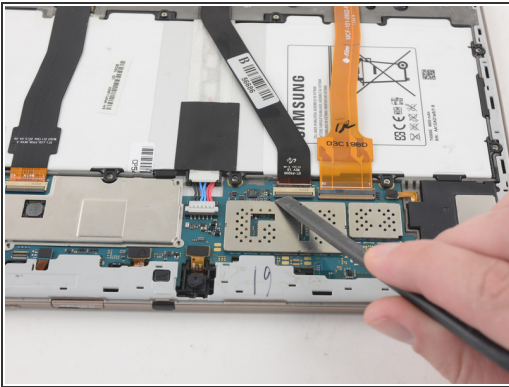

- Use the flat end of a nylon spudger to flip up the black plastic tab of the ZIF connector securing the charging port ribbon cable.
- Gently remove the cable by pulling back, away from the ZIF connector.

Step 4

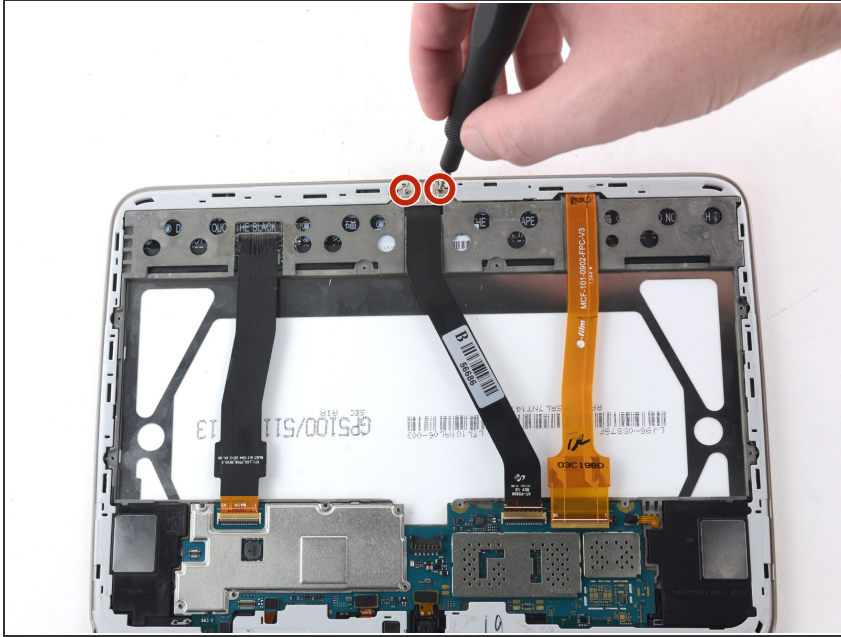

- Use a Philips #000 screw driver to remove the two 3mm screws in metal plate connecting the charging port to the display assembly.

Step 5



- Insert an opening pick between the plastic frame and the screen.
- Slide the opening pick around the perimeter of the screen.
- ⓘ You will hear clicking noises as each plastic clip is released from the display chassis.



Step 6



- Lift the plastic frame to remove.

⚠ Avoid the three delicate ribbon cables.



Step 7

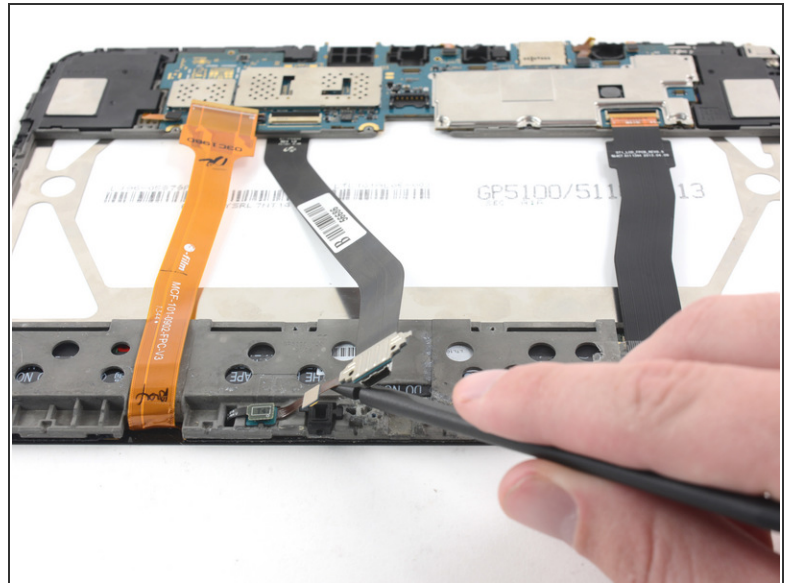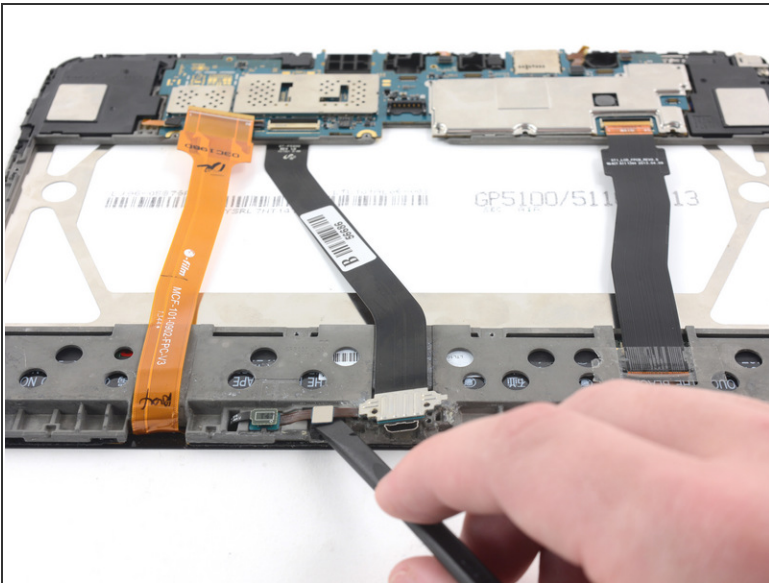

- Use the flat end of a nylon spudger to pry the microphone away from its black rubber housing.


ⓘ There may be some adhesive holding these two components together.

Step 8

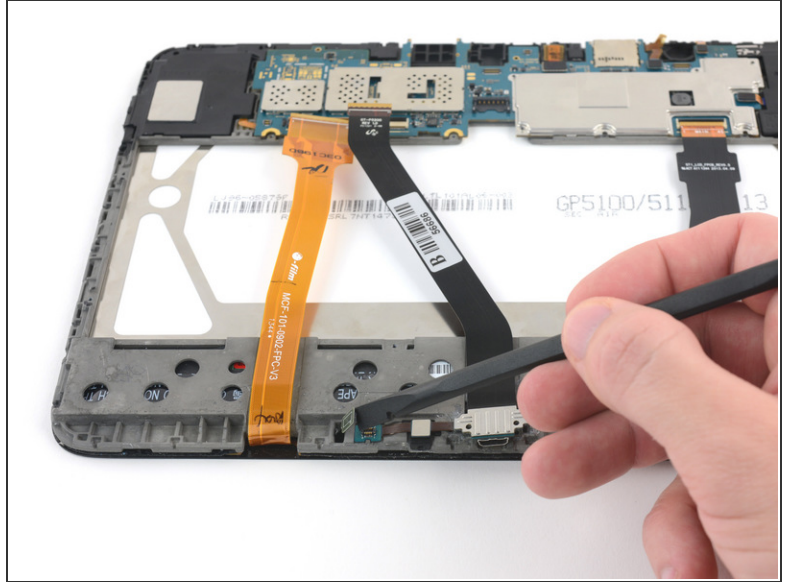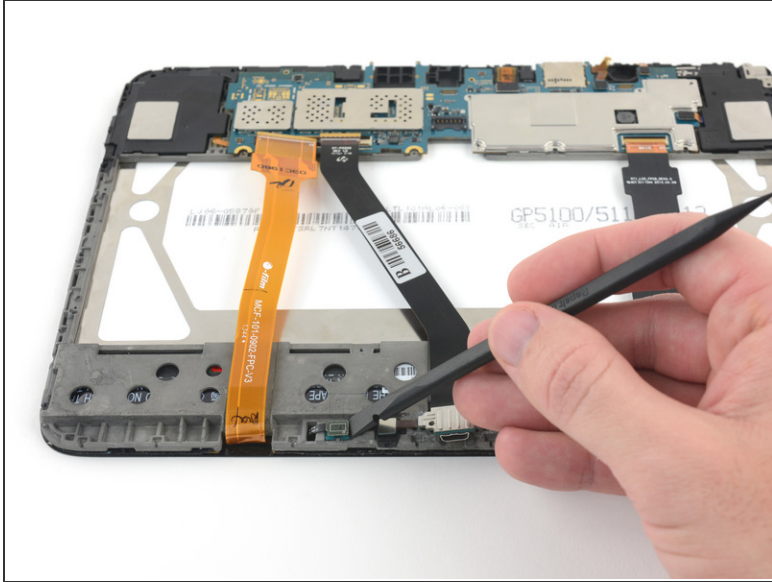

- Use the flat end of a plastic spudger to gently pry the press-fit connector from the microphone's ribbon cable.

Step 9

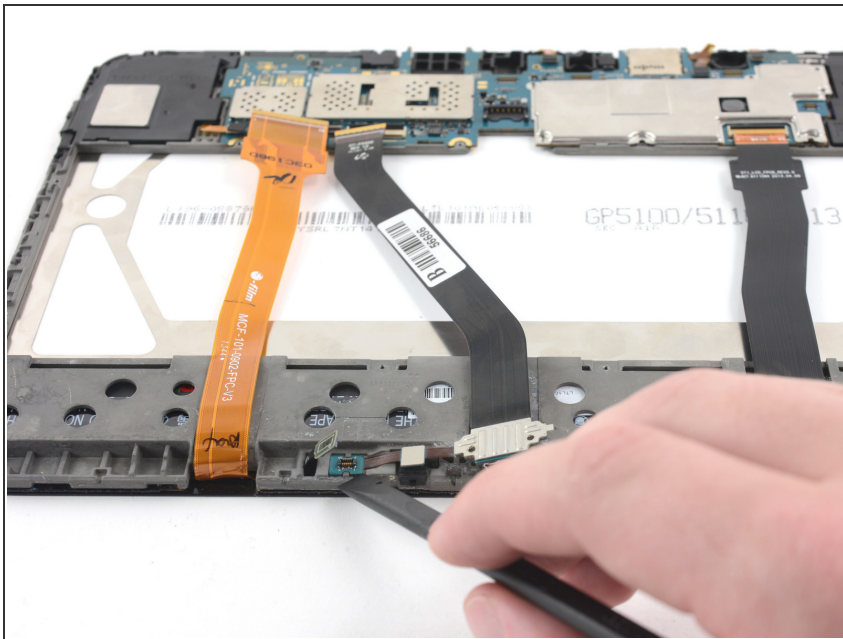

- Use the flat end of a plastic spudger to pry the connection board from the display chassis.
- ⓘ Work slowly as the board is connected with adhesive.
- Remove the charging port cable.

To reassemble your device, follow these instructions in reverse order.

